


## Installation smartphone holder 964/993

- When the ashtray is opened, a tray can be folded down at the top. Behind it are two screws that secure the ashtray.
- Then the original cover can then be removed. It is snapped into place at the rear with two lugs and pushed into two guides at the front.



- Attach the cover to the new holder.
- With your model and year of manufacture, some leather may stand over into the area of the holder. This must then be cut away with a sharp knife (see picture below). The upper surface of the bracket must be flush with the leather. Any protrusion can result in the bracket not coming up far enough and not closing properly. The area is not visible anyway, so there is no problem when refitting.

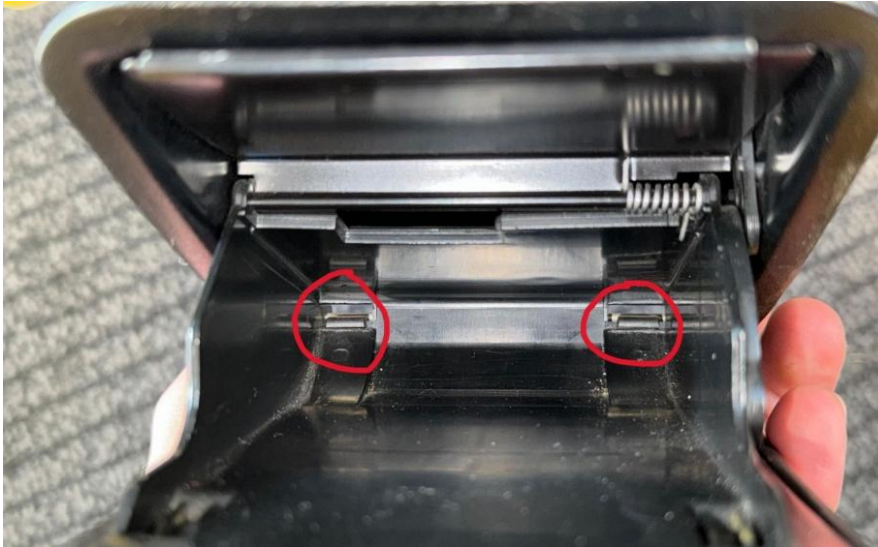

- Power connection either to the ashtray light, in which case it only charges when the light is switched on. Otherwise to the ignition positive from the radio or ignition lock.
- Screw the new holder into the dashboard. It's a bit fiddly to fit the cables behind the black sheet metal, but it works.

- When the holder folds out, pull it up once by hand if necessary and lock it into place. To fold it down, press the button on the left of the arm.

