


Step 1



These bolts and washers are required for mounting each seat.

- 4x M8x25mm Allen
- 4x M8 wave washer
- 4x M8 Washer thick


Step 2 :

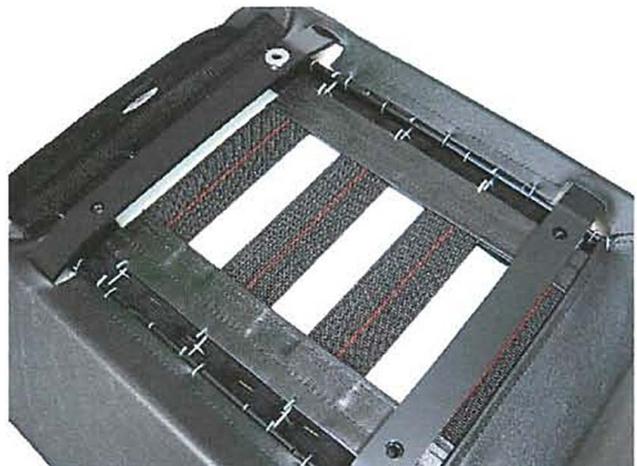

Insert the 5mm thick washer between the seat and seat rail. Start at the front of the seat.

Step 3 :

Screw the seat rail to the seat using the M8 x 25 bolt. Initially only hand tighten, so that the seat rails still move.

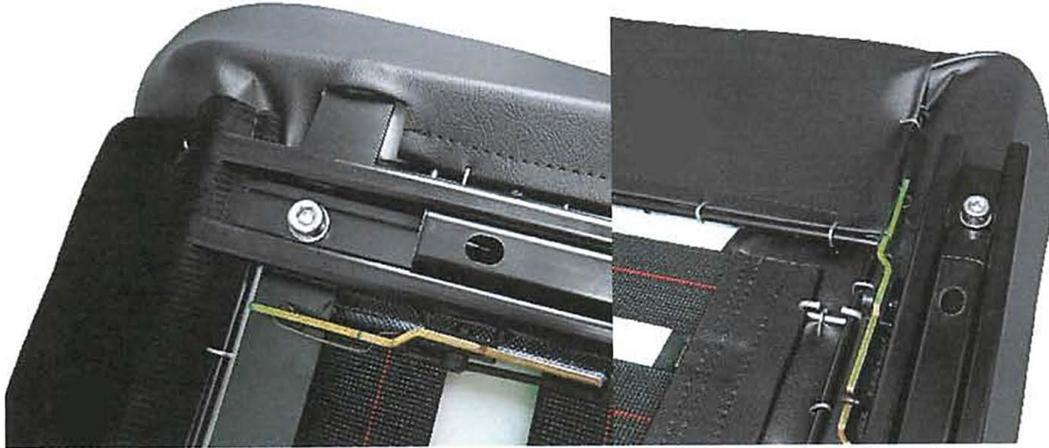


!!Caution, Insert the bolt and only hand tighten to avoid damage to the thread!!

Step 4 :




Attach the rail at the rear and hand tighten.
Attach the rear rail also.

Step 5 :

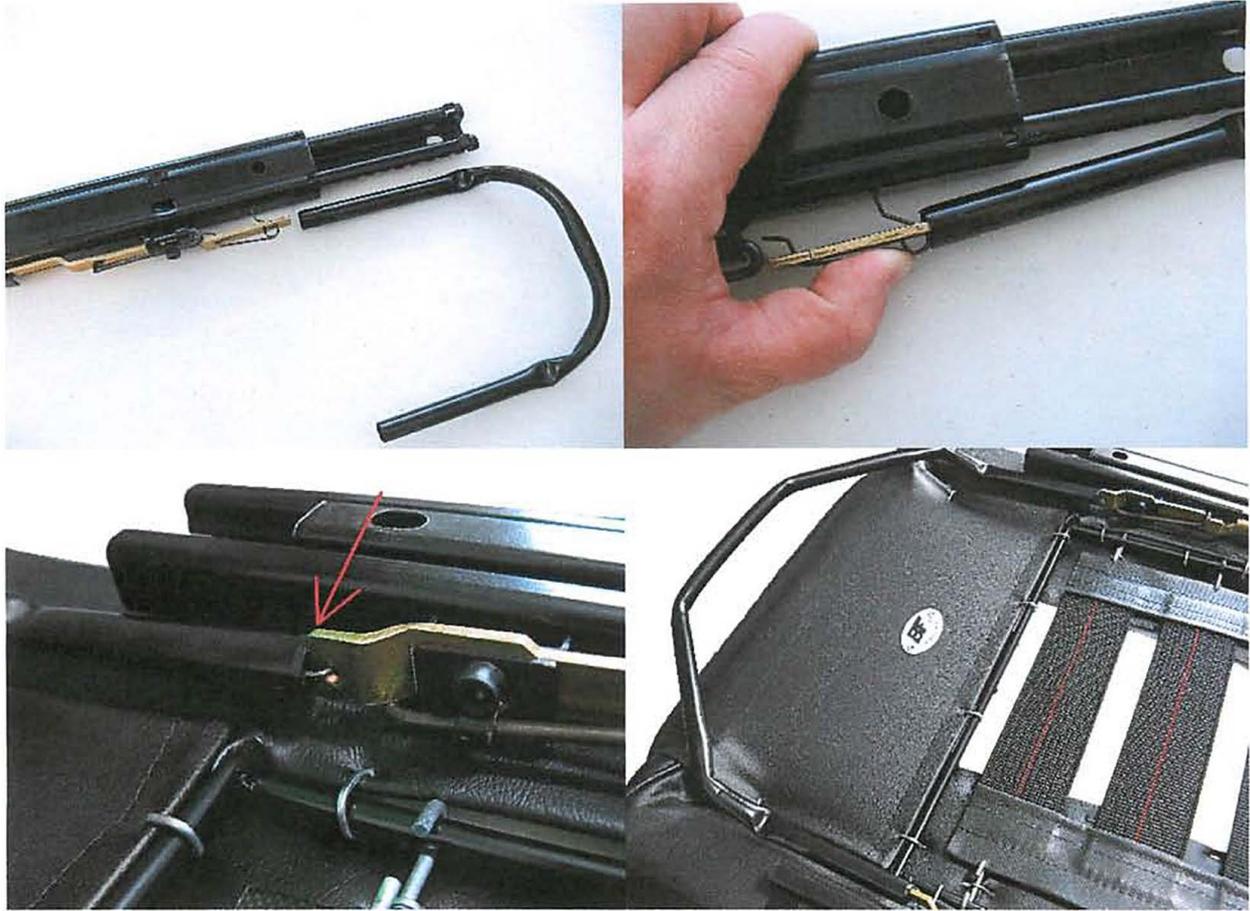


Now insert the adjustment handle on the actuating lugs of the seat rails. Depress the spring slightly as shown in picture. Push the handle onto the lugs as far as it will go.

Step 6 :

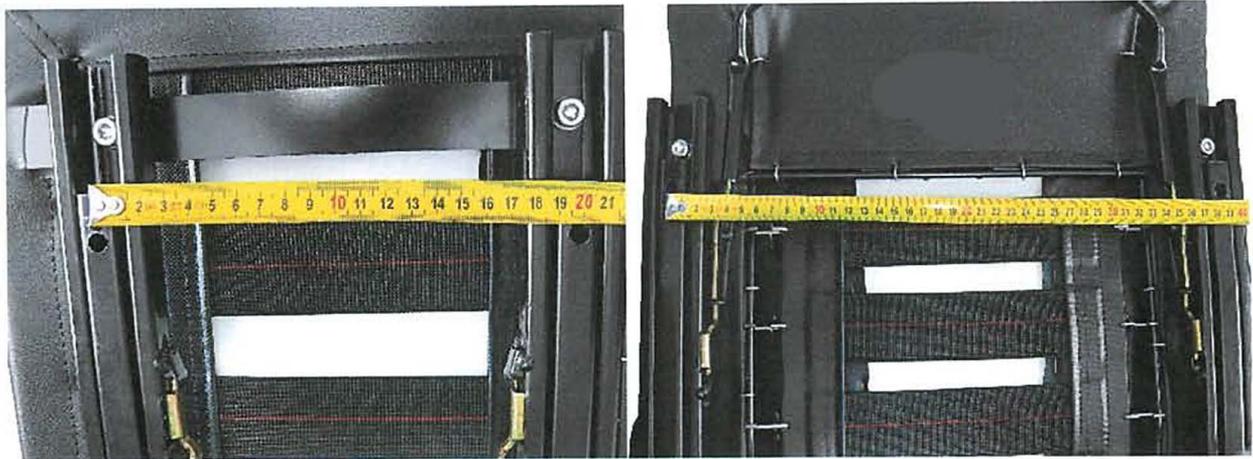


Check the front and rear distance between the bolt centres on rails to ensure they are parallel. There is a little play in the holes to allow for alignment. Set the distance at either 200mm or 385mm and tighten the bolts to lock into place.

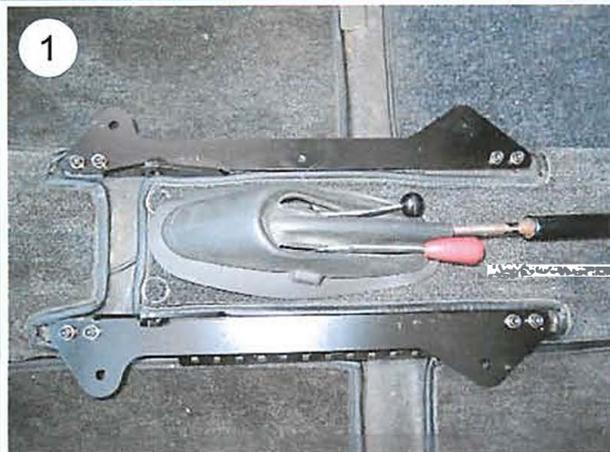

Remove the original seats, including the original seat rails.

Secure the bracket (No. 760) at the original mounting points.

Make sure the seat belt attachment points on the inner brackets are to the rear and facing inwards towards the hand brake.

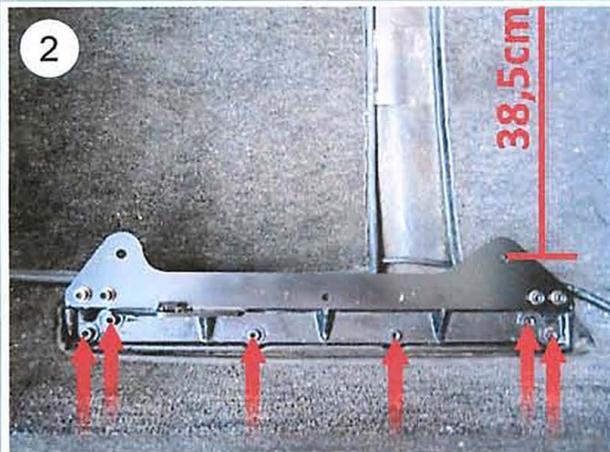

On the outer sills, attach the brackets to the original mounting holes with the seat belt attachment points at the rear also facing outwards. The distance between the hole centres on these brackets where the seat rails attach should be 385mm.



Attach the seats which have the rails already mounted to them. Using the handle, slide the seat all the way back exposing the front attachment holes of the rails. Using M8 x 25 bolts, flat washers and M8 Nyloc nuts, attach the rails to the brackets and tighten the nuts loosely.



Slide the seat forward and attach rails at rear. Once all bolts are in place, tighten all nuts and check that seat slides forward and back easily and does not bind. If it jams, loosen all 4 nuts and slide back and forward, then retighten.



Detail rear fixing



Fully assembled.

Rennsport RS85 Sports Seat
with houndstooth centres